

Applications


- Patented CeFiX® System
- Seals reusable up to 10 times
- Use for Cryo Applications down to -271 degC
- Use for high temperature applications
- Al up to 200 degC, Cu up to 300 degC, Ni up to 450 degC
- Radiation tolerant
- Use for overpressure applications (Ni up to 300 bar)

37

37

EVAC ISO - CeFiX® seals

NW	B
80	91.55
100	120.55
160	171.3
200	222.25
250	273.15

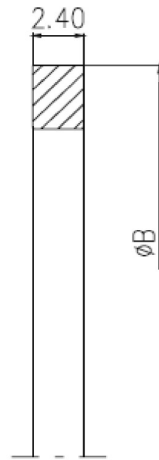

Type NW	Aluminium	OFS Copper	OFS Copper silver-plated	Nickel
80	34.080001.563.108	34.080070.563.408	34.080073.563.908	34.080068.563.608
100	34.100001.563.110	34.100070.563.410	34.100073.563.910	34.100068.563.610
160	34.160001.563.116	34.160070.563.416	34.160073.563.916	34.160068.563.616
200	34.200001.563.120	34.200070.563.420	34.200073.563.920	34.200068.563.620
250	34.250001.563.125	34.250070.563.425	34.250073.563.925	34.250068.563.625

When it needs to be **Tight**