

iXH dry pumps for harsh processes

The iXH dry pump range is an evolution of our market leading iH products and sets new standards for harsh process capability, reliability and lower cost of ownership.

With a modular design, iXH pumps meet today's process requirements and have road-mapped responses to emerging application challenges in high-k, low-k, SACVD, LPCVD, ALD, TCO, GaN and EPI.



Applications

Load Lock	Transfer	Metrology	Lithography	PVD Process	PVD Pre-Clean	RTA	Strip/Ashing	Oxide Etch	Silicon Etch	Metal Etch	Implant Source	HDP-CVD	RTP	SACVD	MOCVD	PECVD	LPCVD	ALD
iXH can be used												iXH recommended						
iGX can be used						iGX recommended												
iXL120(N)																		
Clean Applications												Harsh Applications						
Non-reactive gases used												Corrosive or reactive gases used						

Features and Benefits

- More process capability
 - Greatly increased powder handling capability and innovative Gas Buster™ ⁽¹⁾ technology
 - Wide temperature range allows optimisation of pump to minimise by-product accumulation by condensation and plating
 - Innovative pump seal technology to lengthen process life and reduce leakage risks ⁽¹⁾
- Reduced cost of ownership
 - 10% less energy consumption
 - SEMI® E54 compatible and Green Mode capable
 - Longer overhaul intervals and less unscheduled down time
- Greatly increased hydrogen pumping speed for advanced EPI and solar processes
- High capacity dry pumps and boosters give an expanded process window to enhance yields
- Smaller footprint and lower height for ease of fitting in any fab
- Complies with key international standards including UL, CE and S2

¹ Patent applied for

Technical data

Product		iXH 100	iXH 200H	iXH 610	iXH 1210	iXH 1210H	iXH 1210HT	iXH 1220H
Drypump size	m ³ /h	100	200	100	100	100	100	200
Booster size	m ³ /h			600	1200	1200	1200	1200
Peak Speed	m ³ /h	100	215	665	1025	1065	1000	1250
Ultimate Vac. (Typical)	Torr	1.5x10 ⁻²	7.5x10 ⁻³	3.7x10 ⁻³	3.7x10 ⁻³	3.7x10 ⁻³	7.5x10 ⁻³	3.7x10 ⁻³
System Power at Ult. ⁽²⁾	kW	2.1	3.7	2.6	3.2	4.0	4.0	4.9
Inlet Connection	ISO	63	63	100	100	100	100	100
Outlet Connection	NW	40	40	40	40	40	40	40
Typical Water Flow ⁽¹⁾	l/m	2.0	2.7	3.0	4.0	4.2	4.2	4.7
Purge Flow Range	slm	28/44*	28/44*	22/44*	22/44*	22/44* /60	22/44* /60	34*/96 /122
Weight	kg	260	287	355	430	413		457

Product		iXH 1220HTX	iXH 1820T	iXH 1820	iXH 1820H	iXH 3030TX	iXH 3030 ⁽²⁾	iXH 3030T
Drypump size	m ³ /h	200	200	200	200	300	300	300
Booster size	m ³ /h	1200	1800	1800	1800	3000	3000	3000
Peak Speed	m ³ /h	1250	1700	1820	1825	2750	2900	2750
Ultimate Vac. (Typical)	Torr	3.7x10 ⁻³	3.7x10 ⁻³	3.7x10 ⁻³	3.7x10 ⁻³	3.7x10 ⁻³	3.7x10 ⁻³	3.7x10 ⁻³
System Power at Ult. ⁽²⁾	kW	4.9 ⁽³⁾	4.1	4.0	4.9	5.7 ⁽⁴⁾	5.7	5.7
Inlet Connection	ISO	100	160	160	160	160	160	160
Outlet Connection	NW	40	40	40	40	40	40	40
Typical Water Flow ⁽¹⁾	l/m	4.7	3.5	4.2	4.7	4.5	5.0	4.5
Purge Flow Range	slm	34*/96 /122	34/96* /122	28/44*	34*/96 /122	34*/96 /122	28/44*	34/96* /122
Weight	kg		473	471	487	624	698	700

* Factory default setting


(1) Water consumption varies with pump operating temperature; figures at 110 °C

(2) Average power at 700 T exhaust pressure

(3) Booster heaters add 1 kW when switched on




(4) Booster heaters add 1.5 kW when switched on

Dimensions



Dimensions (mm)	L	W	H
iXH100	784	390	526
iXH200H	901	390	526
iXH610, 1210, 1210H, 1210HT	784	390	780
iXH1220H, 1820, 1820T, 1820H, 1220HTX	901	390	780
iXH3030, 3030T, 3030HTX	915	517	966

Performance curves

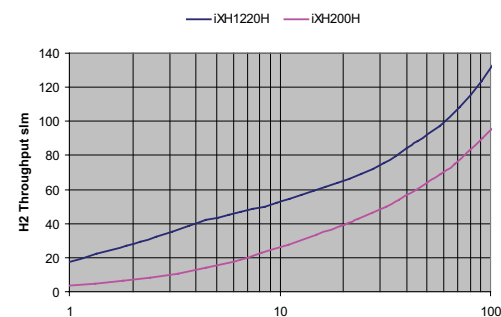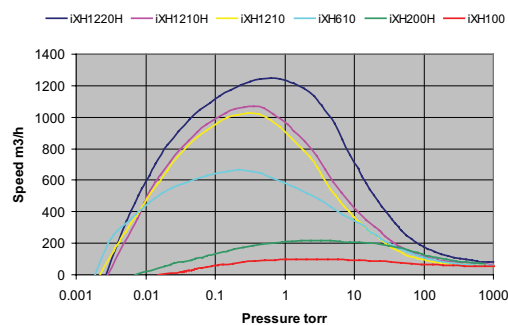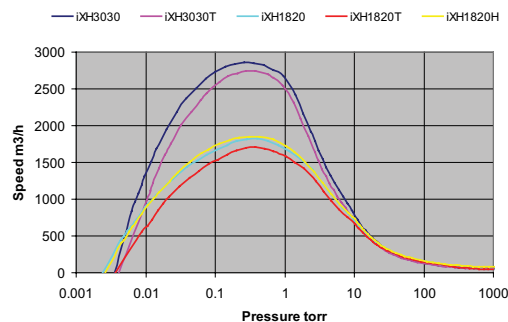

Global contacts

EUROPE

UK Crawley +44 1293 528844
 UK (local rate) 08459 212223
 Belgium Brussels +32 2 300 0730
 France Paris +33 1 4121 1256
 Germany Munich 0800 000 1456
 Italy Milan +39 02 48 4471

USA

Niagara (toll free) +1 800 848 9800
 BRAZIL
 Sao Paulo +55 11 3952 5000
 ISRAEL
 Qiryat-Gat +972 8 681 0633

ASIA PACIFIC

China (toll free) +86 400 111 9618
 India, Pune +91 20 4075 2222
 Japan, Yachiyo +81 47 458 8831
 Korea, Bundang +82 31 716 7070
 Singapore +65 6546 8408
 Taiwan R.O.C. Jhunan Town +886 3758 1000