PRODUCT DATA SHEET



BAROCEL 7025 CAPACITANCE DIAPHRAGM GAUGE

edwardsvacuum.com

The Barocel 7025 capacitance diaphragm gauge is the benchmark for capacitive gauging in harsh environments, giving you piece of mind to focus on fine tuning your processes.

The corrosion resistant ceramic sensor (with total alumina coating) gives you piece of mind that even after extended pressure cycling you will still have a stable and repeatable pressure measurement. This reliability is further extended by the integrated protection filter and shielding. The advanced electronics offer high speed control with simple integration into your system, and combined with the dual set point and easy zero process, the ability to control your system is now even greater.



Features and benefits


- 0.1 to 1000 torr variants
- Fast reaction time
- · Corrosion resistant sensor
- Zero maintenance
- Fantastic zero and full scale stability
- Temperature compensate

Typical applications

- Load Lock , PVD, CVD, etch
- Puller, ovens
- Oxidation
- Industrial

- Sterilization
- Analytical
- Quality control, reference vacuum

Barocel 7025 selection tree

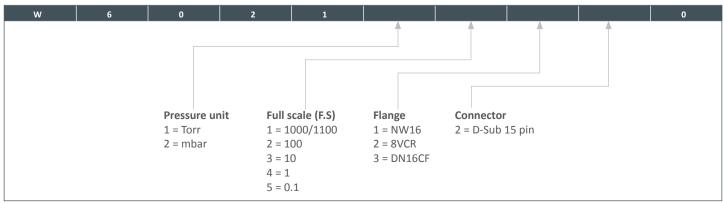

PRODUCT DATA SHEET edwardsvacuum.com

Technical data

Performance	7025			
FS options	1000(1100)	100/10	1	0.1
Accuracy (% of reading)	0.2	0.2	0.2	0.5
Temperature effect				
On zero (percentage FS/°C)	0.005	0.005	0.015	0.02
On span (% of reading/°C)	0.01	0.01	0.01	0.03
Resolution (percent FS)	0.003	0.003	0.003	0.003
Lowest reading (percent FS)	0.05	0.05	0.05	0.05
Admissible temps				
Ambient(°C)	+5 to + 50	+5 to + 50	+5 to + 50	+5 to + 50
Bakeout (at flange) (°C)	<110	<110	<110	<110
Storage (°C)	-40 to +65	-40 to +65	-40 to +65	-40 to +65
Pressure max (kPa) absolute	400	260	260	130
Supply voltage V (dc)	+14 to +30	+14 to +30	+14 to +30	+14 to +30
Power consumption (W)	<1	<1	<1	<1
Output signal V (dc)	0 to +10	0 to +10	0 to +10	0 to +10
Response time (ms)	30	30	30	30
IP rating	30	30	30	30
Dimensions (NW16 & D-sub 15pin)	55x55x113	55x55x113	55x55x113	55x55x113
Materials exposed to vacuum	Aluminium oxide ceramic (AI2O3), stainless steel (AISI 316L)			
Set points				
Number of	2	2	2	2
Relay contact (V (dc))	30	30	30	30
Hysterisis (percent F.S)	1	1	1	1

Ordering information

Accessory	Order number	
TIC instrument controller 6 head capman	D39702000	
TIC adaptor cable for Barocel	D40003050	

Connection cable options	Order number
0.5 m	D40001005
1 m	D40001010
3 m	D40001030
5 m	D40001050
10 m	D40001100
15 m	D40001150
25 m	D40001250
50 m	D40001500

Publication No 3601 0519 01 Issue 2

 $\hbox{@}$ Edwards Limited 2019. All rights reserved Edwards and the Edwards logo are trademarks of Edwards Limited.

Whilst we make every effort to ensure that we accurately describe our products and services, we give no guarantee as to the accuracy or completeness of any information provided in this datasheet.

Edwards Ltd, registered in England and Wales No. 6124750, registered office: Innovation Drive, Burgess Hill, West Sussex, RH15 9TW, UK.

GLOBAL CONTACTS

EMEA		ASIA PACIFIC	
UK	+44 (0) 1444 253 000	China	+86 400 111 9618
	(local rate) 0845 921 2223	India	+91 20 4075 2222
Belgium	+32 2 300 0730	Japan	+81 47 458 8836
France	+33 1 4121 1256	Korea	+82 31 716 7070
Germany	0800 000 1456	Singapore	+65 6546 8408
Italy	+ 39 02 48 4471	Taiwan	+886 3758 1000
Israel	+ 972 8 681 0633		
		AMERICAS	
		USA	+1 800 848 9800
		Brazil	+55 11 3952 5000

